


Nail Fin  
@ 1" or 1 3/8" set back

Wood or steel header as required by engineer\*

Solid member required for head jamb anchoring

Allow 1/2" for Rough Opening

Head jamb crowned per installation instructions

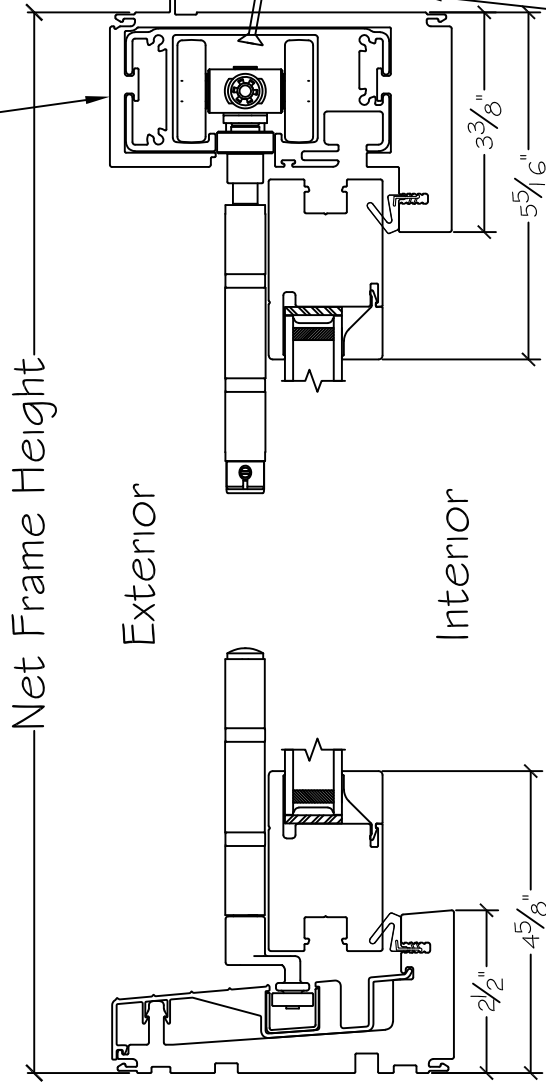

## Critical

### \*Header Notes:

- Add 7 lbs per square foot of door opening to header load requirements.
- Header cannot deflect more than 1/4" over span.
- Solid header must be directly above door for proper anchoring and load requirement.

450 Delta Ave  
Brea, Ca 92821  
(714) 385-1202

**WINDOR**  
www.windorsystems.com

Notice: This document contains information proprietary to and is protected by copyright of Win-Dor Inc. and shall not be copied, disclosed to others, or used for any purpose other than that for which it is given, without the written permission of Win-Dor Inc.

Project: File name: 2750 - Folding Window - Section View with Header Load Requirements

Date: 20180605

Notes: Layout: 2750 Folding Window Vertical Section View

Drawn by: J Johnson